


LCTP - 3-PHASE BUSBAR SERIES

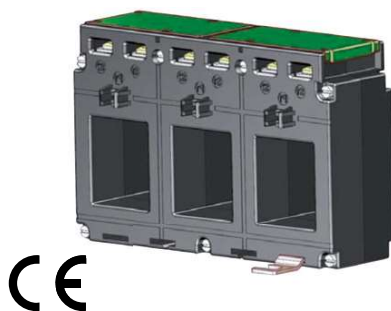

CE

INPUT:

100 A
...
500 A


OUTPUT:

5 A


	LCTP 75/15 (60)	LCTP 105/21 (40)	LCTP 140/31 (40)
Busbar	14 x 24 mm	20 x 24 mm	31 x 36 mm
Depth	60 mm	40 mm	40 mm
Width	76.5 mm	105 mm	140 mm
Primary current	100...160 A	100...250 A	250...500 A
Secondary current	5 A		
Accuracy class	0.5; 1		

DIMENSIONS


LCTP 75/15 (60)

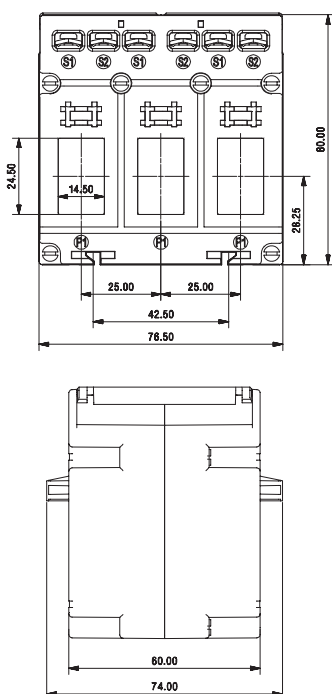

LCTP 105/21 (40)

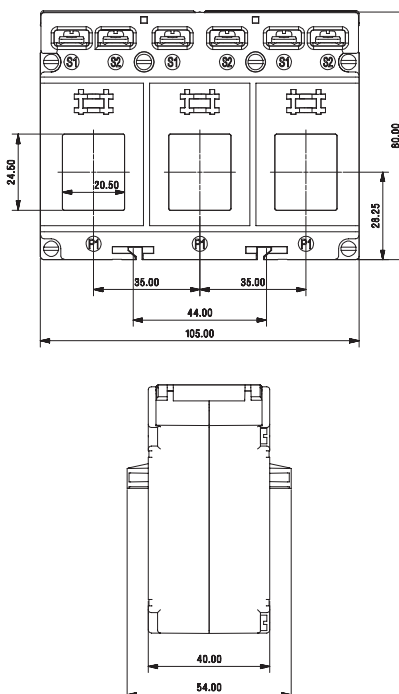

LCTP 140/31 (40)

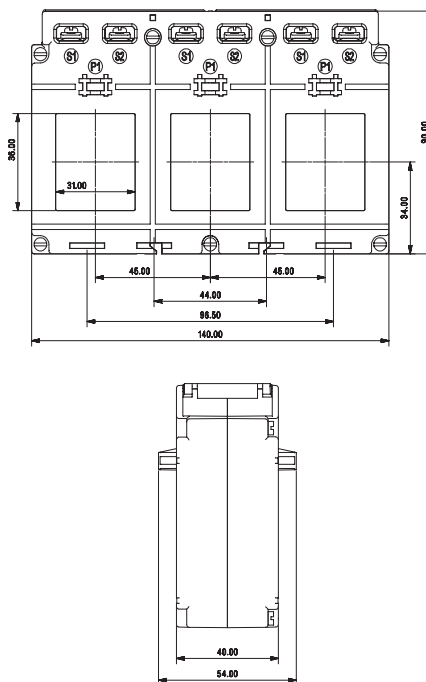

Transformer type	LCTP 75/15 (60)		LCTP 105/21 (40)		LCTP 140/31 (40)	
Accuracy class	0.5	1	0.5	1	0.5	1
Rated primary current	Transformer burden					
100 A	-	1 VA	-	1 VA	-	-
125 A	-	1.5 VA	-	1.5 VA	-	-
150 A	1.5 VA	1.5 VA	-	1.5 VA	-	-
160 A	1.5 VA	1.5 VA	1.5 VA	1.5 VA	-	-
200 A	-	-	1.5 VA	1.5 VA	-	-
250 A	-	-	1.5 VA	1.5 VA	1.5 VA	1.5 VA
300 A	-	-	-	-	2.5 VA	2.5 VA
400 A	-	-	-	-	2.5 VA	2.5 VA
500 A	-	-	-	-	2.5 VA	2.5 VA

ORDER

Required data: transformer type/ primary current/ secondary current/ power/ accuracy class

Order example: LCTP140/31 (40) 500/5A; 2.5 VA; cl. 1

LCTP - 3-PHASE ROUND CONDUCTOR SERIES

	LCTP 185/27 (45)	LCTP 185/37 (45)
Hole diameter	Ø 27 mm	Ø 37 mm
Depth	45 mm	45 mm
Width	185 mm	185 mm
Primary current	100...500 A	300...800 A
Secondary current	5 A	
Accuracy class	1	

INPUT:

100 A
...
800 A



OUTPUT:

5 A





DIMENSIONS

LCTP 185/27 (45)

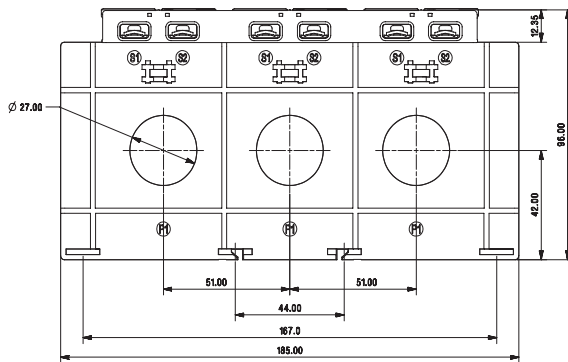

LCTP 185/37 (45)

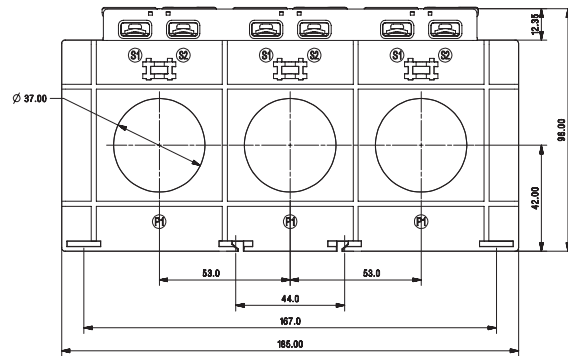

Transformer type	LCTP 185/27 (45)	LCTP 185/37 (45)
Accuracy class	1	1
Rated primary current	Transformer burden	
100 A	1.5 VA	-
150 A	1.5 VA	-
200 A	2.5 VA	-
250 A	2.5 VA	-
300 A	5 VA	2.5 VA
400 A	5 VA	5 VA
500 A	5 VA	5 VA
600 A	-	5 VA
800 A	-	5 VA

ACCESSORIES:

DIN rail mounting base

order code: LH000-0904-130-124

ORDER

Required data: transformer type/ primary current/ secondary current/ power/ accuracy class

Order example: LCTP 185/27 (45) 100/5 A, 1.5 VA, cl. 1