

ENCODER

Profinet Multiturn



Series 8.5868, 8.5888

Key-Features:

- **Solid shaft: maximum diameter 10 mm**
- **Blind hollow shaft: maximum diameter 15 mm**
- **Housing diameter 58 mm**
- **Interface: Profinet IO**
- **Protection class up to IP67**
- **Total resolution up to 28 Bit**
- **Maximum revolution speed 9000 turns/min**
- **Temperature range -40...+80°C**

Content:

Order Code2
Technical Data3
Profinet Interface4
Connection4
Technical Drawing5

Absolute encoders – multturn

Standard
mechanical multturn, optical


Sendix 5868 / 5888 (shaft / hollow shaft)

PROFINET IO



The multturn encoders Sendix 5868 and 5888 with PROFINET interface and optical sensor technology are ideal for use in all applications with PROFINET technology.

The encoder supports the isochronous (IRT) mode and is therefore ideal for real-time applications.

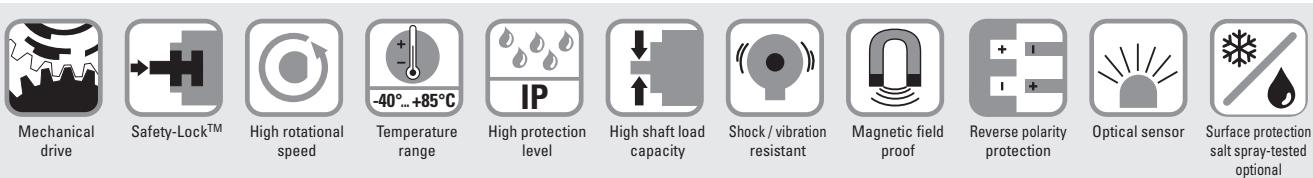

Reliable

- Ideally suited for all PROFINET applications thanks to the use of encoder profile 4.1.
- Perfect for use in harsh outdoor environments, as a result of IP67 protection and rugged housing construction.

Flexible

- Easy setting of a preset value using a control bit (telegram 860).
- IRT-Mode.
- Cycle time ≤ 1 ms.
- Firmware updaters allows for easy expansion of characteristics without having to disassemble the encoder.

Order code **8.5868** . **XXC2** . **C212**
Shaft version Type



a Flange
1 = clamping flange, IP65 \varnothing 58 mm [2.28"]
3 = clamping flange, IP67 \varnothing 58 mm [2.28"]
2 = synchro flange, IP65 \varnothing 58 mm [2.28"]
4 = synchro flange, IP67 \varnothing 58 mm [2.28"]
5 = square flange, IP65 \square 63.5 mm [2.5"]
7 = square flange, IP67 \square 63.5 mm [2.5"]

b Shaft (\varnothing x L), with flat
1 = 6×10 mm [0.24 x 0.39"]¹⁾
2 = 10×20 mm [0.39 x 0.79"]²⁾
3 = 1/4" x 7/8"
4 = 3/8" x 7/8"

c Interface / power supply
C = PROFINET IO / 10 ... 30 V DC
d Type of connection
removable bus terminal cover
2 = 3 x M12 connector, 4-pin

e Fieldbus profile
C2 = PROFINET IO
Optional on request
- Ex 2/22
- surface protection
salt spray tested

Order code **8.5888** . **XXC2** . **C212**
Hollow shaft Type



a Flange
1 = with spring element, long, IP65
2 = with spring element, long, IP67
3 = with stator coupling, IP65 \varnothing 65 mm [2.56"]
4 = with stator coupling, IP67 \varnothing 65 mm [2.56"]
5 = with stator coupling, IP65 \varnothing 63 mm [2.48"]
6 = with stator coupling, IP67 \varnothing 63 mm [2.48"]

b Blind hollow shaft
(insertion depth max. 30 mm [1.18"])
3 = \varnothing 10 mm [0.39"]
4 = \varnothing 12 mm [0.47"]
5 = \varnothing 14 mm [0.55"]
6 = \varnothing 15 mm [0.59"]
8 = \varnothing 3/8"
9 = \varnothing 1/2"

c Interface / power supply
C = PROFINET IO / 10 ... 30 V DC
d Type of connection
removable bus terminal cover
2 = 3 x M12 connector, 4-pin

e Fieldbus profile
C2 = PROFINET IO
Optional on request
- Ex 2/22
- surface protection
salt spray tested

1) Preferred type only in conjunction with flange type 2.
2) Preferred type only in conjunction with flange type 1.

Absolute encoders – multiturn

Standard mechanical multiturn, optical	Sendix 5868 / 5888 (shaft / hollow shaft)	PROFINET IO
Mounting accessory for shaft encoders		
Coupling	bellows coupling ø 19 mm [0.75"] for shaft 6 mm [0.24"] bellows coupling ø 19 mm [0.75"] for shaft 10 mm [0.39"]	Order no. 8.0000.1102.0606 8.0000.1102.1010
Mounting accessory for hollow shaft encoders		
Cylindrical pin, long for flange with spring element (flange type 1 + 2)	Dimensions in mm [inch] with fixing thread 	Order no. 8.0010.4700.0000
Connection technology		
Cordset, pre-assembled	M12 male connector with external thread for port 1 and port 2, 4-pin 2 m [6.56'] PUR cable M12 female connector with coupling nut for power supply, 4-pin 2 m [6.56'] PUR cable	Order no. 05.00.6031.4411.002M 05.00.6061.6211.002M
Connector, self-assembly (straight)	M12 male connector with external thread for port 1 and port 2, 4-pin M12 female connector with coupling nut for power supply, 4-pin	Order no. 05.WASCSY4S 05.B8141-0
Technical data		
Mechanical characteristics		
Maximum speed	IP65 up to 70°C [158°F] 9000 min ⁻¹ , 7000 min ⁻¹ (continuous) IP65 up to T _{max} 7000 min ⁻¹ , 4000 min ⁻¹ (continuous) IP67 up to 70°C [158°F] 8000 min ⁻¹ , 6000 min ⁻¹ (continuous) IP67 up to T _{max} 6000 min ⁻¹ , 3000 min ⁻¹ (continuous)	
Starting torque - at 20°C [68°F]	IP65 < 0.01 Nm IP67 < 0.05 Nm	
Mass moment of inertia	shaft version 3.0 x 10 ⁻⁶ kgm ² hollow shaft version 7.5 x 10 ⁻⁶ kgm ²	
Load capacity of shaft	radial 80 N axial 40 N	
Weight	approx. 0.54 kg [19.05 oz]	
Protection acc. to EN 60529	housing side IP67 shaft side IP65, opt. IP67	
Working temperature range	-40°C ... +85°C [-40°F ... +185°F]	
Material	shaft/hollow shaft stainless steel flange aluminum housing zinc die-cast	
Shock resistance acc. to EN 60068-2-27	2500 m/s ² , 6 ms	
Vibration resistance acc. to EN 60068-2-6	100 m/s ² , 55 ... 2000 Hz	
Electrical characteristics		
Power supply	10 ... 30 V DC	
Power consumption (no load)	max. 200 mA	
Reverse polarity protection of the power supply	yes	
UL approval	file 224618	
CE compliant acc. to	EMC guideline 2014/30/EU RoHS guideline 2011/65/EU	
Interface characteristics PROFINET IO		
Resolution singleturn	1 ... 65535 (16 bit), scalable default: 8192 (13 bit)	
Number of revolutions (multiturn)	max. 4096 (12 bit) scalable only via the total resolution	
Total resolution	1 ... 268.435.456 (28 bit), scalable default: 33.554.432 (25 bit)	
Code	binary	
Protocol	PROFINET IO	
Link 1 and 2, LED (green / yellow)		
two colored	green	active link
	yellow	data transfer
Error LED (red) / PWR LED (green)		
Functionality see manual		

Absolute encoders – multturn

Standard
mechanical multturn, optical

Sendix 5868 / 5888 (shaft / hollow shaft)

PROFINET IO

General information about PROFINET IO

The PROFINET encoder implements the Encoder Profile 4.1. (according to the specification Encoder Version 4.1 Dec 2008")

It permits scaling and preset values, as well as many other additional parameters to be programmed via the PROFINET-Bus.

When switching on, all parameters are loaded from an EEPROM, where they were saved previously to protect them against power-failure, or taken over by the controller in the start-up phase.

Position, speed and many other states of the encoder can be transmitted.




PROFINET IO


The complete encoder profile according to profile encoder version 4.1 as well as the identification & maintenance functionality version 1.16 has been implemented. IM blocks 0, 1, 2, 3 and 4 are supported.

The **Media Redundancy Protocol** is implemented here.

Basically, the advantage of MRP is that the functionality of the components, which are wired in a ring structure, is maintained in case of a failure or of a breakage of the wires in any location.

Terminal assignment

Interface	Type of connection	Function	M12 connector, 4-pin					
C 2 (3 x M12 connector)	Bus port 1	Signal:	Transmit data+	Receive data+	Transmit data -	Receive data -		
		Abbreviation:	TxD+	RxD+	TxD-	RxD-		
		Pin:	1	2	3	4		
	Power supply	Signal:	Voltage +	-	Voltage -	-		
		Abbreviation:	+V	-	0V	-		
		Pin:	1	2	3	4		
	Bus port 2	Signal:	Transmit data+	Receive data+	Transmit data -	Receive data -		
		Abbreviation:	TxD+	RxD+	TxD-	RxD-		
		Pin:	1	2	3	4		

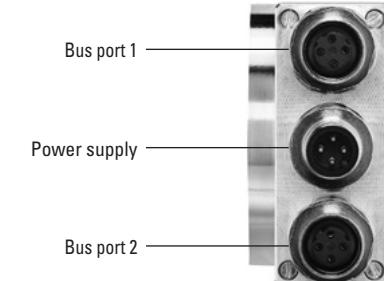

Absolute encoders – multturn

Standard
mechanical multturn, optical

Sendix 5868 / 5888 (shaft / hollow shaft)

PROFINET IO



Dimensions shaft version, with removable bus terminal cover

Dimensions in mm [inch]

Clamping flange, ø 58 [2.28]

Flange type 1 and 3

- [1] 3 x M3, 6.0 [0.24] deep
- [2] 3 x M4, 8.0 [0.31] deep

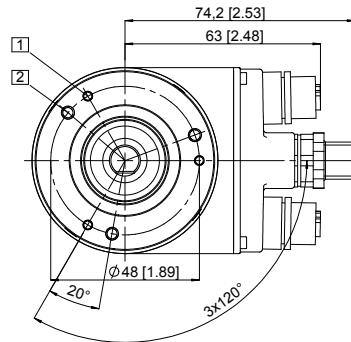
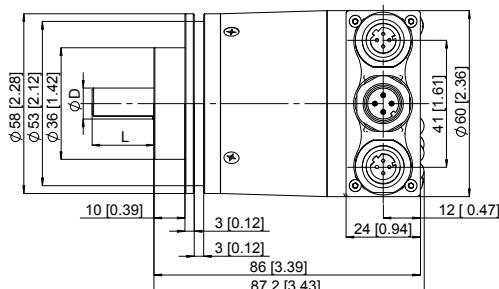


D	Fit	L
6 [0.24]	h7	10 [0.39]
10 [0.39]	f7	20 [0.79]
1/4"	h7	7/8"
3/8"	h7	7/8"

Synchro flange, ø 58 [2.28]

Flange type 2 and 4



- [1] 3 x M4, 6.0 [0.24] deep

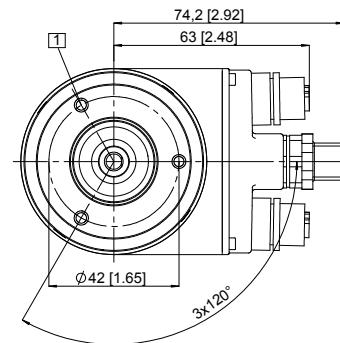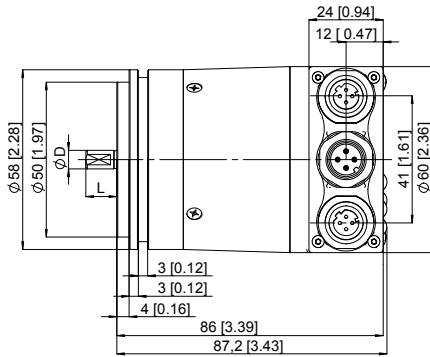

D	Fit	L
6 [0.24]	h7	10 [0.39]
10 [0.39]	f7	20 [0.79]
1/4"	h7	7/8"
3/8"	h7	7/8"

Square flange, □ 63.5 [2.5]

Flange type 5 and 7

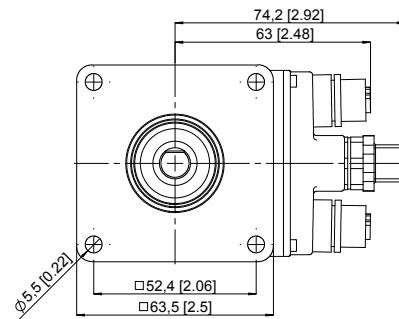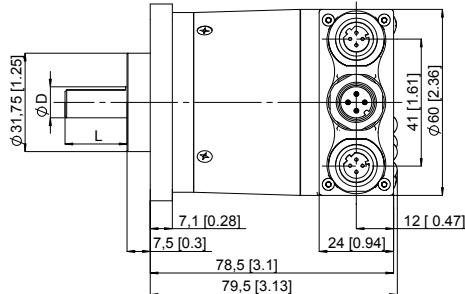

D	Fit	L
6 [0.24]	h7	10 [0.39]
10 [0.39]	f7	20 [0.79]
1/4"	h7	7/8"
3/8"	h7	7/8"

Absolute encoders – multturn

Standard
mechanical multturn, optical

Sendix 5868 / 5888 (shaft / hollow shaft)

PROFINET IO

Dimensions hollow shaft version (blind hollow shaft), with removable bus terminal cover

Dimensions in mm [inch]



Flange with spring element, long

Flange type 1 and 2

- 1 Slot spring element
recommendation:
cylindrical pin DIN 7, ø 4 [0.16]
- 2 3 x M3, 5.5 [0.22] deep
- 3 Recommended torque for the
clamping ring 0.6 Nm

D	Fit	L
10 [0.39]	H7	30 [1.18]
12 [0.47]	H7	30 [1.18]
14 [0.55]	H7	30 [1.18]
15 [0.59]	H7	30 [1.18]
3/8"	H7	30 [1.18]
1/2"	H7	30 [1.18]

L = insertion depth max. blind hollow shaft

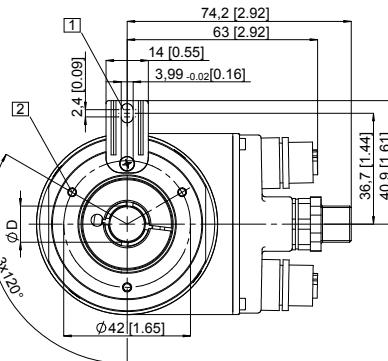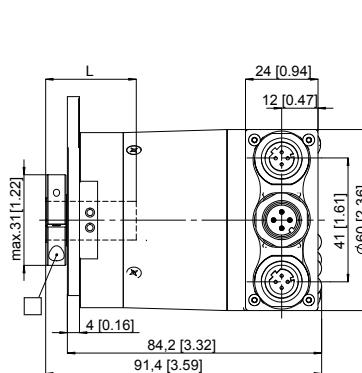



Flange with stator coupling, ø 63 [2.48]

Flange type 5 and 6

- 1 Recommended torque for the
clamping ring 0.6 Nm

D	Fit	L
10 [0.39]	H7	30 [1.18]
12 [0.47]	H7	30 [1.18]
14 [0.55]	H7	30 [1.18]
15 [0.59]	H7	30 [1.18]
3/8"	H7	30 [1.18]
1/2"	H7	30 [1.18]

L = insertion depth max. blind hollow shaft

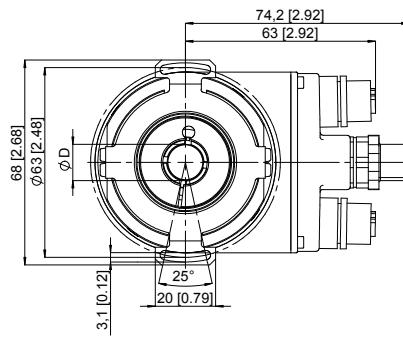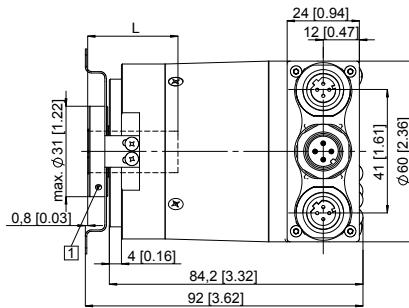



Flange with stator coupling, ø 65 [2.56]

Flange type 3 and 4

- 1 Recommended torque for the
clamping ring 0.6 Nm

D	Fit	L
10 [0.39]	H7	30 [1.18]
12 [0.47]	H7	30 [1.18]
14 [0.55]	H7	30 [1.18]
15 [0.59]	H7	30 [1.18]
3/8"	H7	30 [1.18]
1/2"	H7	30 [1.18]

L = insertion depth max. blind hollow shaft

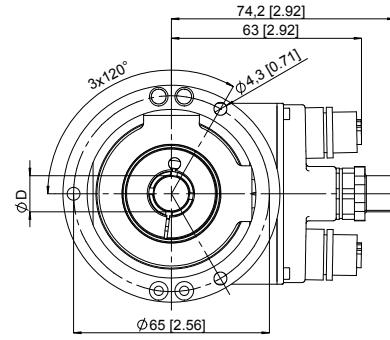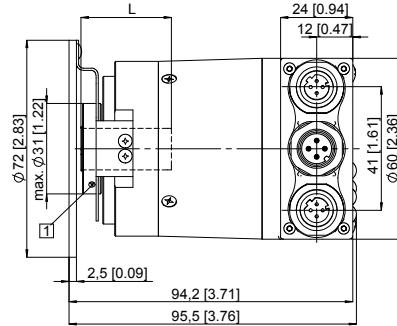

Subject to change without prior notice.

WayCon Positionsmesstechnik GmbH

email: info@waycon.de
internet: www.waycon.biz

WayCon
Positionsmesstechnik

Head Office

Mehlbeerenstr. 4

82024 Taufkirchen

Tel. +49 (0)89 67 97 13-0

Fax +49 (0)89 67 97 13-250

Office Köln

Auf der Pehle 1

50321 Brühl

Tel. +49 (0)2232 56 79 44

Fax +49 (0)2232 56 79 45