




Capacity from 50 kg to 500 kg

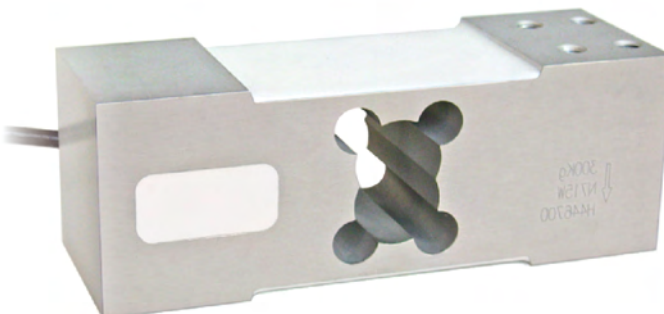

- ALUMINUM ALLOY
- COMBINED ERROR $\leq \pm 0.02\%$ (0.017% C4)
- PROTECTION CLASS IP65

CAPACITY	kg	ACCURACY CLASS C3	C4	IECEx	Ex	EAC	PLATFORM DIMENSION (mm)	NET WEIGHT OF LOAD CELL (kg)	CODE
50		•	—	•	•	•	600 x 600	1.7	APL50
100		•	—	•	•	•	600 x 600	1.7	APL100
150		•	•	•	•	•	600 x 600	1.7	APL150
200		•	•	•	•	•	600 x 600	1.7	APL200
300		•	•	•	•	•	600 x 600	1.7	APL300
500		•	•	•	•	•	600 x 600	1.7	APL500

ON REQUEST

CERTIFICATIONS



OIML R60 C3

CERTIFICATIONS ON REQUEST



ATEX II 1GD (zone 0-1-2-20-21-22)



IECEx (zone 0-1-2-20-21-22)



OIML R60 C4




Complies with the Eurasian Custom Union regulations (Russia, Belarus, Kazakhstan)

COMPLEMENTARY ACCESSORIES

	DESCRIPTION	CODE
	Stainless steel and rubber waterproof kit.	IP68APLPRE
	Stainless steel drawn block.	BLOCAPL

DIMENSIONS (mm)

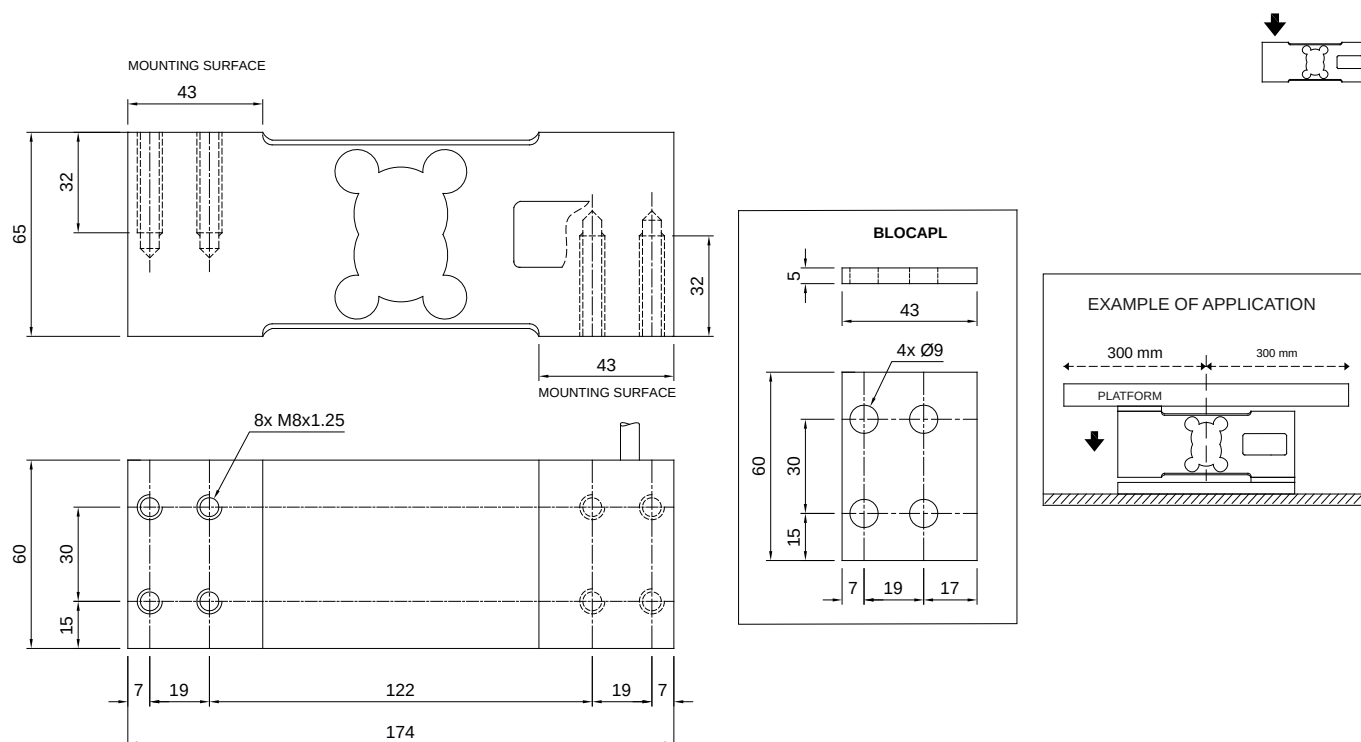

TECHNICAL FEATURES

Material	Aluminum alloy	
OIML R60 Accuracy class • Verification intervals	C3 • 3000	C4 • 4000
Nominal load (E max)	50 - 100 - 150 - 200 - 300 - 500 kg	150 - 200 - 300 - 500 kg
Minimum verification interval (V min)	E max / 12000	E max / 15000
Combined error	≤ ±0.02%	≤ ±0.017%
Protection class	IP65	
Rated output	2 mV/V ±10%	Input resistance 409 Ω ±6
Temperature effect on zero	0.0017% °C	Output resistance 350 Ω ±3
Temperature effect on span	0.0014% °C	Zero balance ≤ ±1%
Compensated temperature range	-10 °C / +40 °C	Insulation resistance ≥5000 MΩ
Operating temperature range	-35 °C / +65 °C	Safe overload (% of full scale) 150%
Creep at nominal load in 30 minutes	0.015%	Ultimate overload (% of full scale) 300%
Max supply voltage without damage	18 V	Deflection at nominal load 0.5 mm

ELECTRICAL CONNECTIONS

Cable lenght	3 m
Cable diameter	6 mm
Cores	4/6 x 0.20 mm ²

SHIELD	
+ SIGNAL	GREEN
+ EXCITATION	RED
+ REF./SENSE	BLUE
- SIGNAL	WHITE
- EXCITATION	BLACK
- REF./SENSE	YELLOW

■ where provided

The Company reserves the right to make changes to the technical data, drawings and images without notice.