

LRC- RESIN CAST SERIES

	LRC1 80/30(50)	LRC2 90/50(40)
Hole diameter	Ø 30 mm	Ø 50 mm
Depth	50 mm	40 mm
Width	80 mm	90 mm
Primary current	60 A...160 A	200 A...320 A
Secondary current	1 A, 5 A	
Accuracy class	1	


INPUT:

60 A
...
320 A

OUTPUTS:


5 A

1 A




DIMENSIONS

LRC1 80/30(50)

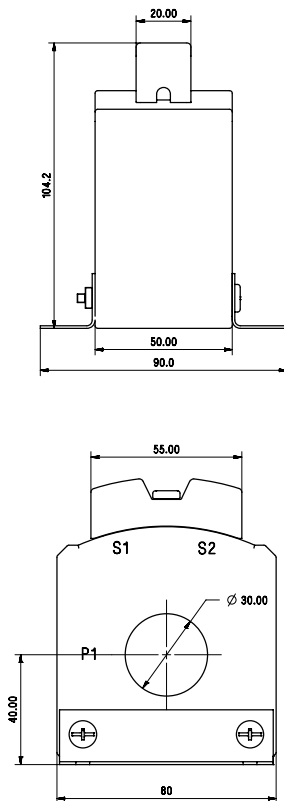

LRC2 90/50(40)

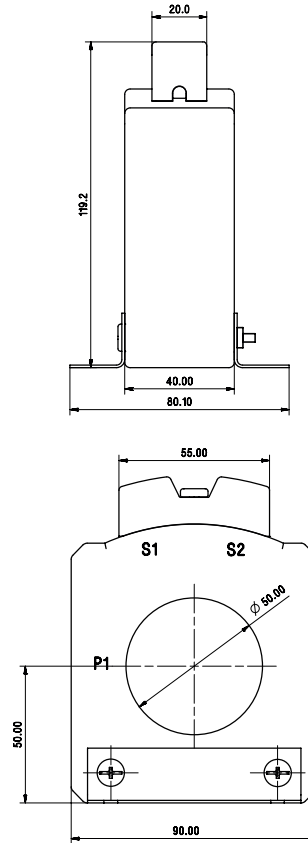

Transformer type	LRC1 80/30(50)	LRC2 90/50(40)
Accuracy class	1	1
Rated primary current	Transformer burden	
60 A	1.5 VA	-
100 A	5 VA	-
125 A	5 VA	-
150 A	5 VA	-
160 A	5 VA	-
200 A	-	5 VA
250 A	-	10 VA
300 A	-	10 VA
320 A	-	10 VA

ORDER

Required data: transformer type/ primary current/ secondary current/ power/ accuracy class

Order example: LRC1 80/30(50) 100/5A, 5VA, cl. 1

LRC- RESIN CAST SERIES

	LRC3 110/72(40)	LRC4 135/85(40)
Hole diameter	Ø 72 mm	Ø 85 mm
Depth	40 mm	40 mm
Width	110 mm	135 mm
Primary current	400 A...630 A	800 A...1250 A
Secondary current	1 A, 5 A	
Accuracy class	1	


INPUT:

400 A
...
1250 A

OUTPUTS:


5 A

1 A




DIMENSIONS

LRC3 110/72(40)

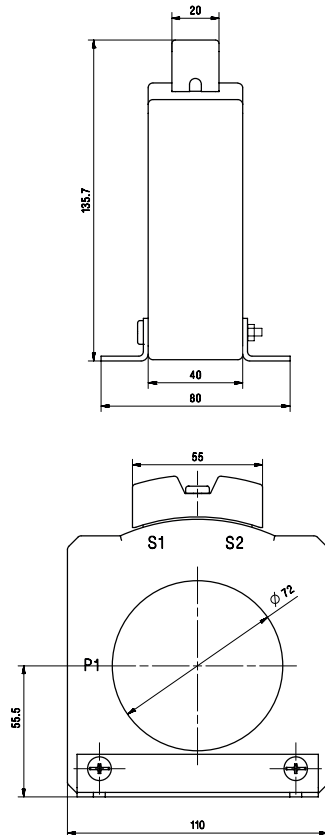

LRC4 135/85(40)

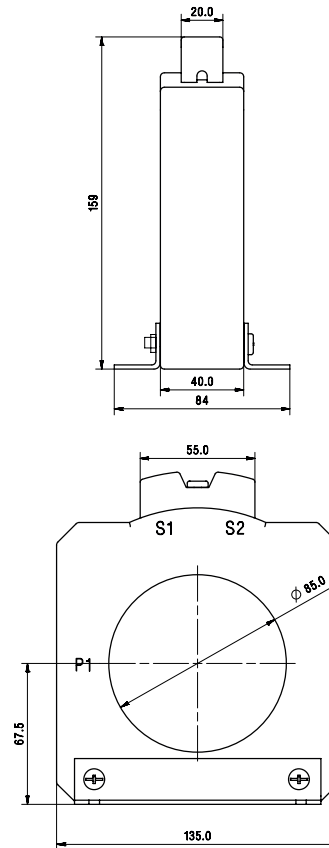

Transformer type	LRC3 110/72(40)	LRC4 135/85(40)
Accuracy class	1	1
Rated primary current	Transformer burden	
400 A	10 VA	-
500 A	15 VA	-
600 A	15 VA	-
630 A	15 VA	-
800 A	-	15 VA
1000 A	-	15 VA
1200 A	-	15 VA
1250 A	-	15 VA

ORDER

Required data: transformer type/ primary current/ secondary current/ power/ accuracy class

Order example: LRC3 110/72(40) 600/5A, 15VA, d. 1

LRC- RESIN CAST SERIES


	LRC5 165/115(40)	LRC6 195/130(40)
Hole diameter	Ø 115 mm	Ø 130 mm
Depth	40 mm	40 mm
Width	165 mm	195 mm
Primary current	1500 A...2000 A	2500 A...3200 A
Secondary current	1 A, 5 A	
Accuracy class	1	

INPUT:

1500 A
...
3200 A


OUTPUTS:

5 A 1 A




DIMENSIONS

LRC5 165/115(40)

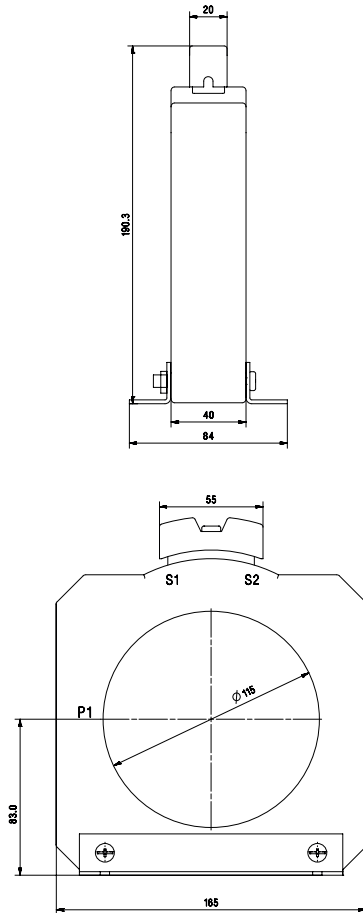

LRC6 195/130(40)

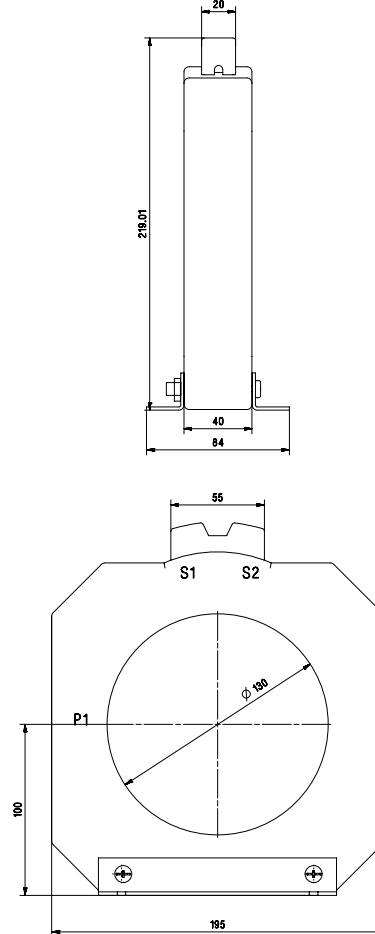

Transformer type	LRC5 165/115(40)	LRC6 195/130(40)
Accuracy class	1	1
Rated primary current	Transformer burden	
1500 A	15 VA	-
1600 A	15 VA	-
2000 A	15 VA	-
2500 A	-	15 VA
3000 A	-	15 VA
3200 A	-	15 VA

ORDER

Required data: transformer type/ primary current/ secondary current/ power/ accuracy class

Order example: LRC5 165/115(40) 2000/5A, 15VA, cl. 1

LRC- RESIN CAST SERIES

	LRC7 230/165(40)	LRC8 295/200(40)
Hole diameter	Ø 165 mm	Ø 200 mm
Depth	40 mm	40 mm
Width	230 mm	295 mm
Primary current	3000 A...3200 A	4000 A....5000 A
Secondary current	1 A, 5 A	
Accuracy class	1	


INPUT:

3000 A
...
5000 A

OUTPUTS:


5 A

1 A




DIMENSIONS

LRC7 230/165(40)

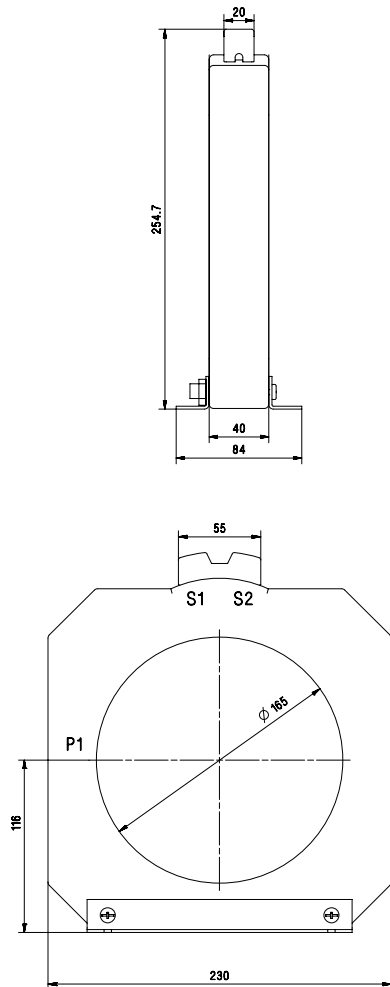

LRC8 295/200(40)

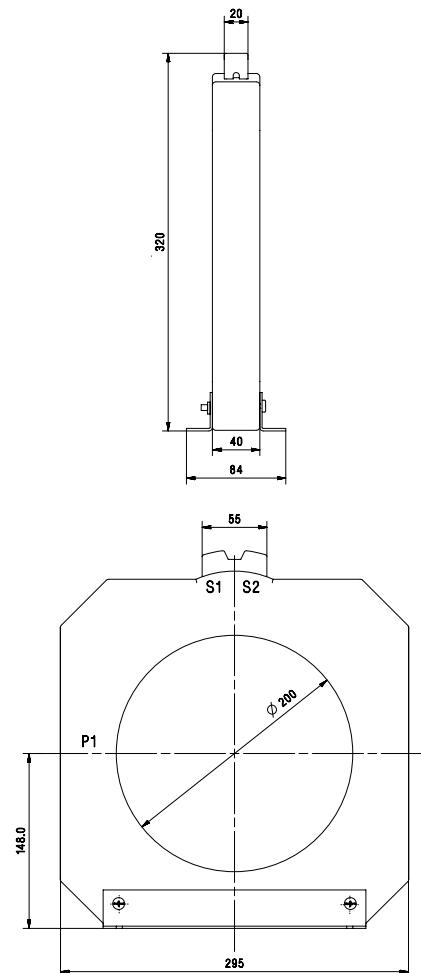

Transformer type	LRC7 230/165(40)	LRC8 295/200(40)
Accuracy class	1	1
Rated primary current	Transformer burden	
3000 A	15 VA	-
3200 A	15 VA	-
4000 A	-	15 VA
5000 A	-	15 VA

ORDER

Required data: transformer type/ primary current/ secondary current/ power/ accuracy class

Order example: LRC7 230/165(40) 3000/5A, 15VA, kl. 1